


2/14

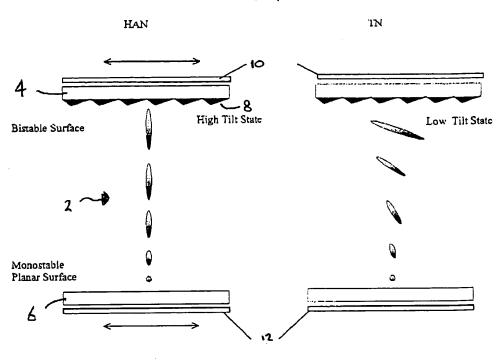

a)

b)

Figure 2.

3/14

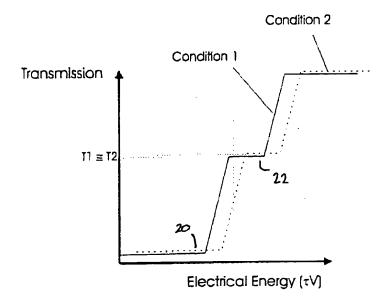


Figure 3.


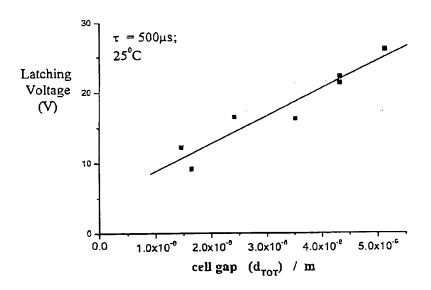


Figure 4.

4/14


Latching Voltage (V)

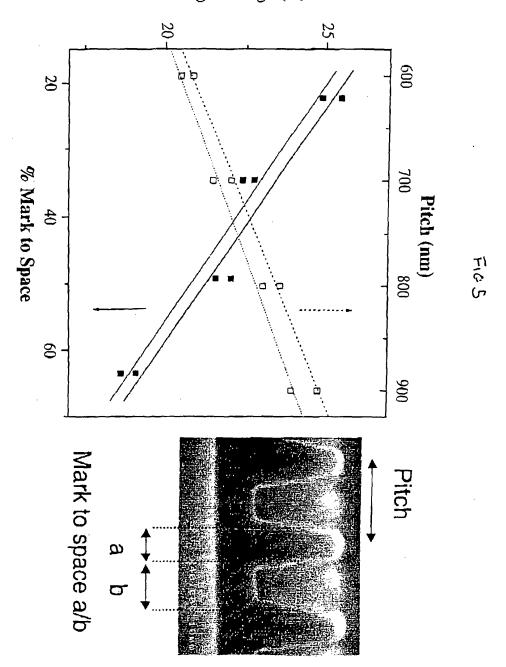


Attorney Docket No.: 527122000400 Filing Date: July 7, 2003


Inventors: John C. Jones et al. Serial No.: NEW APPLICATION

5/14

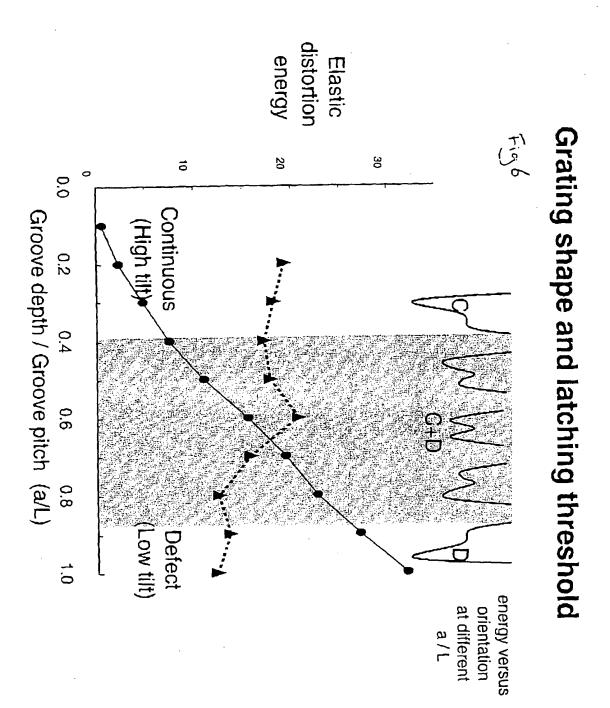

6/14

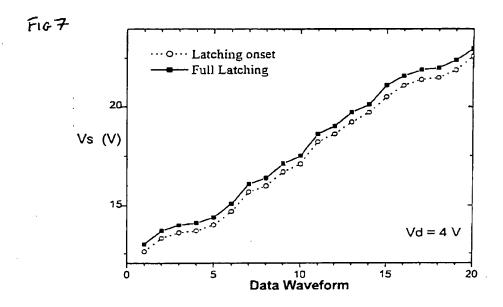


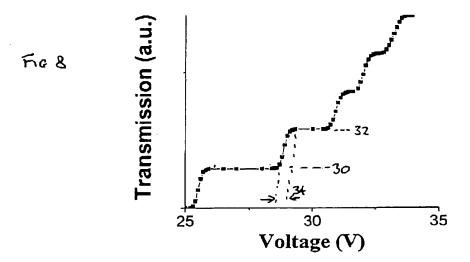


Filing Date: July 7, 2003

C

Inventors: John C. Jones et al. Serial No.: NEW APPLICATION

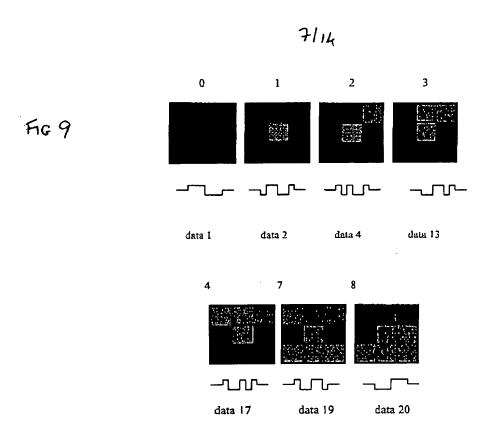

Filing Date: July 7, 2003 Inventors: John C. Jones et al. Serial No.: NEW APPLICATION

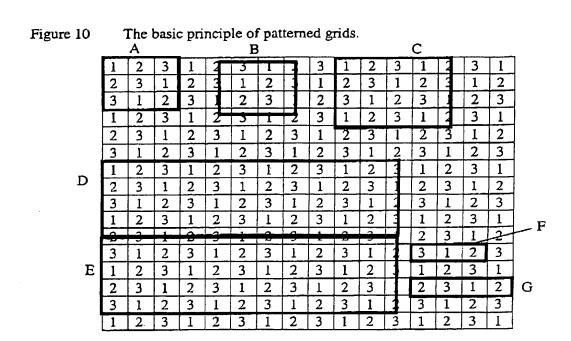

F	3	4	2	r	2	4	3	1	3	4	2
1	3	 	} 	<u> </u>	-	 	+=-	1 -	13		† :
2	1	3	4	3	1	2	4	2_	1	3	4
4	2	1	3	4	3	1	2	4	2	1	3
3	4	2	1	2	4	3	1	3	4	2	1
1	2	4	3	1	3	4	2	1	2	4	3
3	1	2	4	2	1	3	4	3	1	2	4
4	3	1	2	4	2	1	3	4	3	1	2
2	4	3	١,	3	4	2	1	2	4	3	1
1	3	4	2	1	2	4	3	1	3	4	2
2	1	3	4	3	1	2	4	2	1	3	4
4	2	1	3	4	3	1	2	4	2	1	3
3	4	2	1	2	4	3	1	3	4	2	1

Figure 11

Attorney Docket No.: 527122000400 Filing Date: July 7, 2003

Inventors: John C. Jones et al.
Serial No.: NEW APPLICATION

2	3	2	3	2	3	2	3 I	3	1 2	2	2
3	2	3	2	3	2	3	2	I	3	3	1
1	3	1	3	1	3	1	3	2	1	1	2
2	1	2	1	2	1	2	1	3	2	2	3
3	2	3	2	3	2	3	2	1	3	3	1
1	3	1	3	2	3	2	3	3	1	2	2
2		2				2		ی			

Figure 12 Examples of super structures used for 4 analogue grey levels.

Filing Date: July 7, 2003 Inventors: John C. Jones et al. Serial No.: NEW APPLICATION

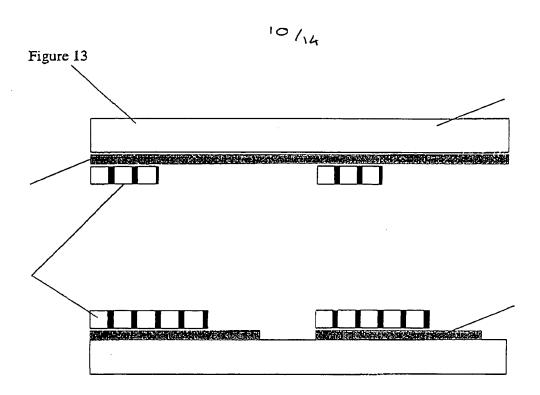



Figure 14																
_	1	1	2	1	1	2	1	1	2	1	I	2	1	1	2	1
Α	1	2	1	1	2	1	1	2	1	1	2	1	1	2	1	1
	2	1	1	2	1	1	2	1	1	2	1	1	2	1	1	2
	1	1	2	1	1	2	1	1	2	1	1	2	1	1	2	1
ı	1_	2	1	1	2	1	1	2	1	1	2	1	1	2	1	1
	2	1	1	2	1	1	2	1	1	2	1	1_	2	1	1	2
В	1	1	2	1	1	2	1	1	2	1_	1	2	1	1	2	1
2	1	2	1	1	2	1	1	2	1	1	2	1	1	2	1	1
	2	1	1	2	1	1	2	1	1	2	1	1	2	1	1	2
	1	1	2	1	1	2	1	1_	2	1	1	2	1	1	2	1
•	1	2	1	1	2	1	1	2	1_	_1	2	1	1	2	1	1
	2	1_	1	2	1	1_	2	1	1	2	1	1	2	1	1	2
<u> </u>	1	1	2	1	1	2	1	1	2	1	1	1	l	1	2	1
С	1	2	1	1	2	l	l	2	1	1	2	1	1	2	1	l
	2	1	1	2	1	1	2	ı	1	2	l		2	1	1	2
	1	ì	2	-1	1	2	1	1	2	<u> </u>	+	_ إ	1	1	2	1

Filing Date: July 7, 2003

Inventors: John C. Jones et al. Serial No.: NEW APPLICATION

11/14

Figure 15a

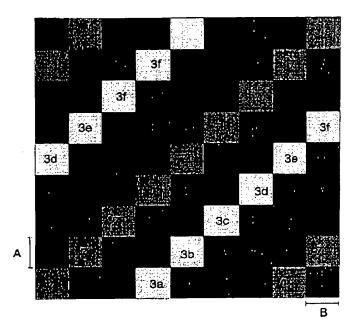

Grid Structure:
Comprising 7 different pitches
Pitch 1=1200nm
Pitch 2=1100nm
Pitch 3=1000nm
Pitch 4=900nm
Pitch 5=800nm
Pitch 6=700nm
Pitch 7=600nm

Equal mark to space Pitch 1=600nm chrome 600nm gap Pitch 2=550nm chrome 550nm gap Pitch 3=500nm chrome 500nm gap etc

Horizontal repeat unit 49 squares with 1 square translation between successive rows.

This is due to corrections for imperfect 4.8micron gridding

Each Grating Length A=4.8microns

Each grating width is tiled to fit a whole number of grooves, however in order to rebalance the area dimension B expresses the width of the grating regions:

4 whole pitches B=4.8microns Pitch 2: 2a 4 whole pitches B=4.4 microns 2b 5 whole pitches B=5.5microns 2c 4 whole pitches B=4.4microns 2d 4 whole pitches B=4.4microns 2e 5 whole pitches B=5.5microns 2f 4 whole pitches B=4.4microns 2g 4 whole pitches B=4.4microns Pitch 3: 3a 5 whole pitches B=5.0microns 3b 5 whole pitches B=5.0microns 3c 5 whole pitches B=5.0microns 3d 5 whole pitches B=5.0microns 3e 5 whole pitches B=5.0microns 3f 4 whole pitches B=4.0microns 3g 5 whole pitches B=5.0microns Pitch 4: 4a 5 whole pitches B=4.5microns 4b 5 whole pitches B=4.5microns 4c 6 whole pitches B=5.4microns 4d 5 whole pitches B=4.5microns 4e 5 whole pitches B=4.5microns 4f 5 whole pitches B=5.4microns 4g 5 whole pitches B=4.5microns

Pitch 5: 6 whole pitches B=4.8microns
Pitch 6: 6a 7 whole pitches B=4.9microns
6b 7 whole pitches B=4.9microns
6c 7 whole pitches B=4.9microns
6d 7 whole pitches B=4.9microns
6e 6 whole pitches B=4.2microns
6f 7 whole pitches B=4.9microns
6g 7 whole pitches B=4.9microns
Pitch 7: 8 whole pitches B=4.8microns


Error row a: -0.4 microns Error row b: +0.7microns Error row c: +0.5microns Error row d: -0.4microns Error row e: +0.0microns Error row f: -0.5microns Error row g: -0.4microns

Filing Date: July 7, 2003

Inventors: John C. Jones et al. Serial No.: NEW APPLICATION

12/14

Fig 15b

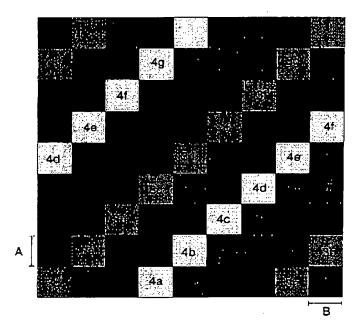

Grid Structure:
Comprising 7 different pitches
Pitch 1=1200nm
Pitch 2=1100nm
Pitch 3=1000nm
Pitch 4=900nm
Pitch 5=800nm
Pitch 6=700nm
Pitch 7=600nm

Equal mark to space Pitch 1=600nm chrome 600nm gap Pitch 2=550nm chrome 550nm gap Pitch 3=500nm chrome 500nm gap etc

Horizontal repeat unit 49 squares with 1 square translation between successive rows.

This is due to corrections for imperfect 4.8micron gridding

Each Grating Length A=4.8microns


Each grating width is tiled to fit a whole number of grooves, however in order to rebalance the area dimension B expresses the width of the grating regions: widths for individual labelled areas identical to area 3 (pattern 7) but as stated above regions have been reordered.

Attorney Docket No.: 527122000400 Filing Date: July 7, 2003

Inventors: John C. Jones et al. Serial No.: NEW APPLICATION

13/14

Fig 15c

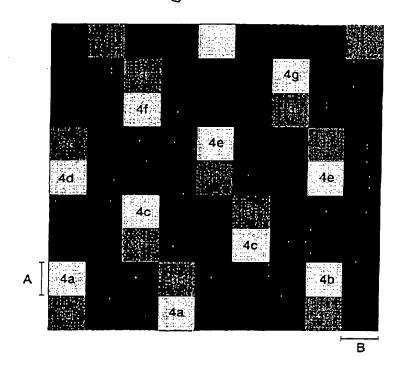

Dimensions of regions (2a etc) identical to those written down for Area 3. However again the layout of regions is swaped around.

Horizontal repeat unit 49 squares with 1 square translation between

successive rows. Row1:1246753 Row 2: 1357642 Row 3 same as row 1 Row 4 same as row 2 etc

Figure 16

